
DataLine F/UTP 200 MHz Cat5e

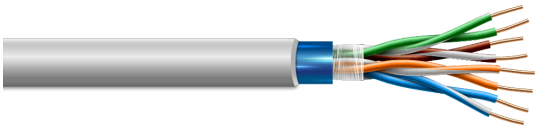

Application

The high-frequency properties are much better than required in Category 5e. The slim design and high flexibility make for easy installation in risers and cable channels up to the workplace.

The materials used are free from silicon and cadmium and free from varnish damaging sustances.

Application

The high-frequency properties are much better than required in Category 5e. The slim design and high flexibility make for easy installation in risers and cable channels up to the workplace.

The materials used are free from silicon and cadmium and free from varnish damaging sustances.

Standards

ISO/IEC 11801 Ed.2:2002, EN50173-1:2002, TIA/EIA 568 B.2-
1:2002 und EN 50173,
DIN EN 60332-1-1:2017-09;VDE 0482-332-1-1:2017-09

Standards

ISO/IEC 11801 Ed.2:2002, EN50173-1:2002, TIA/EIA 568 B.2-
1:2002 und EN 50173,
DIN EN 60332-1-1:2017-09;VDE 0482-332-1-1:2017-09

Construction

Inner Conductor	0,53mm bare copper (AWG24/1)
Core Insulation	PE or SFS-PE foamed
Core Color	wt-bl, wt-or, wt-gn, wt-br (IEC 708-1)
Stranding Elements	4 pairs twisted
Inner Sheath Material	Polypropylen-Folie (PP)
Overall Shielding	Al-foil
Outer Insulation Material	FR-PVC

Construction

Inner Conductor	0,53mm bare copper (AWG24/1)
Core Insulation	PE or SFS-PE foamed
Core Color	wt-bl, wt-or, wt-gn, wt-br (IEC 708-1)
Stranding Elements	4 pairs twisted
Inner Sheath Material	Polypropylen-Folie (PP)
Overall Shielding	Al-foil
Outer Insulation Material	FR-PVC

Technical Data

Nominal Voltage	U_0/U: 125 /0 V
Nominal Volatage DC	U_0/U: 0 /0
Test Voltage	700 V
Bending Radius moved (xD)	8
Bending Radius fixed (xD)	4
Operating Temperature solid	-20 °C bis 60 °C
Operating Temperature moving	0 °C bis 50 °C

Technical Data

Nominal Voltage	U_0/U: 125 /0 V
Nominal Volatage DC	U_0/U: 0 /0
Test Voltage	700 V
Bending Radius moved (xD)	8
Bending Radius fixed (xD)	4
Operating Temperature solid	-20 °C to 60 °C
Operating Temperature moving	0 °C to 50 °C

ACS Handels GmbH
Kabel - Leitungen - Zubehör
Bahnhofstraße 1, 4531 Kematen / Krems

Tel.: +43 7228 200 880
E-Mail: office@acs.at

Technische Änderungen und Druckfehler vorbehalten
Technical changes and printing errors reserved

Produktabbildungen sind Symbolfotos
Product images are symbolic photos

Copyright© ACS Handels GmbH

Datenkabel Kategorie 5-7
Computer Cables Cat. 5-7

Prod. Nr. Prod. Nr.	Dimensions Dimensions	Color Color	Weight (kg/km) approx. Weight (kg/km) approx.	Outer-Diameter (mm) approx. Outer-Diameter (mm) approx.
03422001	4x2 x AWG 24/1	grey - grey	43,0	6,5

ACS Handels GmbH
Kabel - Leitungen - Zubehör
Bahnhofstraße 1, 4531 Kematen / Krems

Tel.: +43 7228 200 880
E-Mail: office@acs.at

Technische Änderungen und Druckfehler vorbehalten
Technical changes and printing errors reserved

Produktabbildungen sind Symbolfotos
Product images are symbolic photos

Copyright© ACS Handels GmbH