


# DataLine F/UTP 200 MHz Cat5e

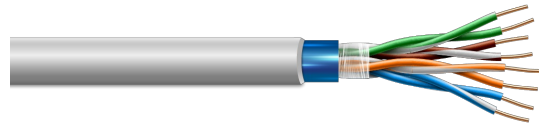

## Application

The high-frequency properties are much better than required in Category 5e. The slim design and high flexibility make for easy installation in risers and cable channels up to the workplace.

The materials used are free from silicon and cadmium and free from varnish damaging substances.

## Standards

ISO/IEC 11801 Ed.2:2002, EN50173-1:2002, TIA/EIA 568 B.2-1:2002 und EN 50173,  
DIN EN 60332-1-1:2017-09;VDE 0482-332-1-1:2017-09

## Construction

**Inner Conductor** 0,53mm bare copper (AWG24/1)  
**Core Insulation** PE or SFS-PE foamed  
**Core Color** wt-bl, wt-or, wt-gn, wt-br (IEC 708-1)  
**Stranding Elements** 4 pairs twisted  
**Inner Sheath Material** Polypropylen-Folie (PP)  
**Overall Shielding** Al-foil  
**Outer Insulation Material** FR-PVC

## Technical Data

**Nominal Voltage**  $U_0/U$ : 125 /0 V  
**Nominal Volatage DC**  $U_0/U$ : 0 /0  
**Test Voltage** 700 V  
**Bending Radius moved (xD)** 8  
**Bending Radius fixed (xD)** 4  
**Operating Temperature solid** -20 °C bis 60 °C  
**Operating Temperature moving** 0 °C bis 50 °C

## Application

The high-frequency properties are much better than required in Category 5e. The slim design and high flexibility make for easy installation in risers and cable channels up to the workplace.

The materials used are free from silicon and cadmium and free from varnish damaging substances.

## Standards

ISO/IEC 11801 Ed.2:2002, EN50173-1:2002, TIA/EIA 568 B.2-1:2002 und EN 50173,  
DIN EN 60332-1-1:2017-09;VDE 0482-332-1-1:2017-09

## Construction

**Inner Conductor** 0,53mm bare copper (AWG24/1)  
**Core Insulation** PE or SFS-PE foamed  
**Core Color** wt-bl, wt-or, wt-gn, wt-br (IEC 708-1)  
**Stranding Elements** 4 pairs twisted  
**Inner Sheath Material** Polypropylen-Folie (PP)  
**Overall Shielding** Al-foil  
**Outer Insulation Material** FR-PVC

## Technical Data

**Nominal Voltage**  $U_0/U$ : 125 /0 V  
**Nominal Volatage DC**  $U_0/U$ : 0 /0  
**Test Voltage** 700 V  
**Bending Radius moved (xD)** 8  
**Bending Radius fixed (xD)** 4  
**Operating Temperature solid** -20 °C to 60 °C  
**Operating Temperature moving** 0 °C to 50 °C

# Datenkabel Kategorie 5 - 7 Computer Cables



Prod. Nr.	Dimensions	Color	Weight (kg/km) approx.	Outer-Diameter (mm) approx.
Prod. Nr.	Dimensions	Color	Weight (kg/km) approx.	Outer-Diameter (mm) approx.
03422001	4x2 x AWG 24/1	grey - grey	43,0	6,5

**ACS Handels GmbH**  
**Kabel - Leitungen - Zubehör**  
Bahnhofstraße 1, 4531 Kematen / Krems

Tel.: +43 7228 200 880  
E-Mail: [office@acs.at](mailto:office@acs.at)

Technische Änderungen und Druckfehler vorbehalten  
Technical changes and printing errors reserved

Produktabbildungen sind Symbolfotos  
Product images are symbolic photos

Copyright© ACS Handels GmbH